

Nivo®

Einbauring Trockenbau

Recessed Mount Drywall Ring

Bague encastrable pour plaques de plâtre

Anello di installazione per cartongesso

Anillo de instalación de paneles de yeso

Installatiering voor gipsplaat

Pierścień montażowy do suchej zabudowy

Gipskarton szerelőgyűrű

[DE] Installationsanleitung

[EN] Installation Guide

[FR] Guide d'installation


[IT] Istruzioni di installazione

[ES] Instrucciones de instalación

[NL] Installatiehandleiding

[PL] Instrukcja montażu

[HU] Telepítési útmutató

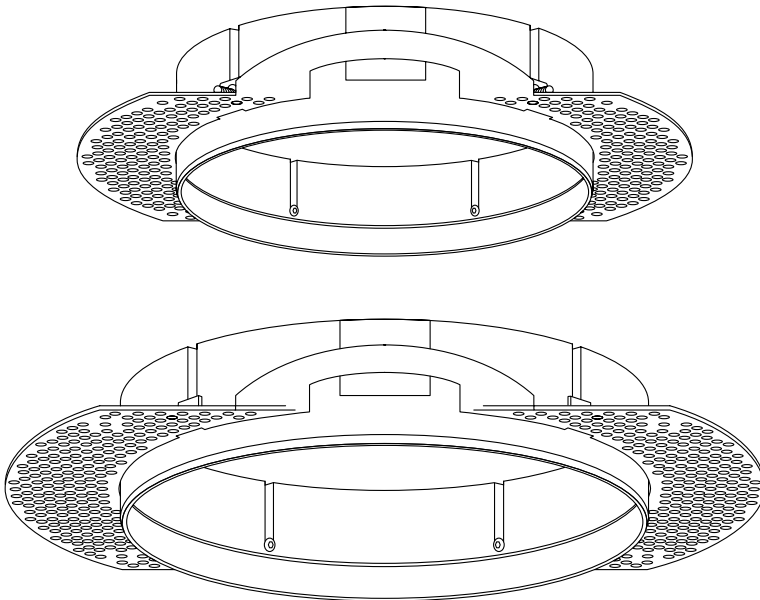

Inhalt  
Content  
Contenu  
Contenuto  
Contenido  
Inhoud  
Objętość  
Tartalmat

	[DE]
03	Sicherheitshinweise
04	Montage
	[EN]
07	Safety instructions
08	Assembly
	[FR]
11	Consignes de sécurité
12	Assemblée
	[IT]
15	Istruzioni di sicurezza
16	Assemblea
	[ES]
19	Instrucciones de seguridad
20	Asamblea
	[NL]
23	Veiligheidsinstructies
24	Montage
	[PL]
27	Instrukcje bezpieczeństwa
28	Montaż
	[HU]
31	Biztonsági utasítások
32	Összeszerelés

# Nivo® Einbauring Trockenbau



Der Einbauring Trockenbau von Sigor ist bestimmt für das Einarbeiten mit einem üblichen Kleber in Trockenbauplatten. Die Einbauleuchten der Nivo Leuchtenserie lassen sich hiermit besonders spektakulär randlos und deckenbündig in die Fläche einfügen.

Zu verwenden und bestimmt für die Leuchten mit Ø 111 mm :

4811401 Nivo® Einbaubauleuchte fix 111 mm 36° schwarz  
4811501 Nivo® Einbaubauleuchte fix 111 mm 36° weiß  
4811601 Nivo® Einbaubauleuchte fix 111 mm 50° schwarz  
4811701 Nivo® Einbaubauleuchte fix 111 mm 50° weiß

4811001 Nivo® Einbaubauleuchte schwenkbar 111 mm 36° schwarz  
4811101 Nivo® Einbaubauleuchte schwenkbar 111 mm 36° weiß  
4811201 Nivo® Einbaubauleuchte schwenkbar 111 mm 50° schwarz  
4811301 Nivo® Einbaubauleuchte schwenkbar 111 mm 50° weiß

4812401 Nivo® Pendelleuchte Einbau 36° schwarz  
4812501 Nivo® Pendelleuchte Einbau 36° weiß  
4812601 Nivo® Pendelleuchte Einbau 50° schwarz  
4812701 Nivo® Pendelleuchte Einbau 50° weiß

Zu verwenden und bestimmt für die Leuchten mit Ø 142 mm :

4810401 Nivo® Einbauleuchte schwenkbar 142 mm 36° schwarz  
4810501 Nivo® Einbauleuchte schwenkbar 142 mm 36° weiß  
4810601 Nivo® Einbauleuchte schwenkbar 142 mm 50° schwarz  
4810701 Nivo® Einbauleuchte schwenkbar 142 mm 50° weiß

## Entsorgung


Leuchten von Sigor sind RoHS konform und gehören am Ende ihrer Lebenszeit zurück zu ihrem Fachhändler oder in eine Sammelstelle für Elektrogeräte. Bitte nicht im Hausmüll entsorgen.

## Lieferumfang


- Nivo® Einbauring Trockenbau
- Diese Installations- und Betriebsanleitung

## Haftungsausschluss


Hinweis: Bei Nichtbeachtung dieser Anleitung sowie bei unsachgemäßer Verwendung besteht kein Garantieanspruch, die Sigor Licht GmbH übernimmt in dem Fall keinerlei Haftung.

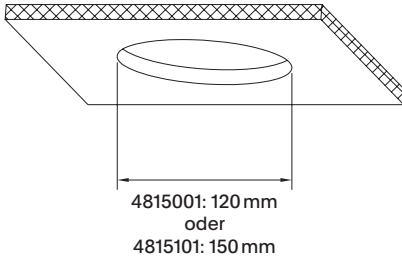


[1] Gipskarton Platten-Stärke 9-25 mm.  
Deckenausschnitt entsprechend mit 120 oder 150 mm  
Durchmesser erstellen.

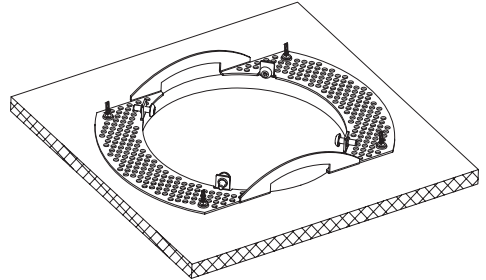


[2] Die Trägerplatte als Schablone für die Bohr-  
löcher verwenden. Den Ring deckungsgleich zum  
Ausschnitt zentrieren.

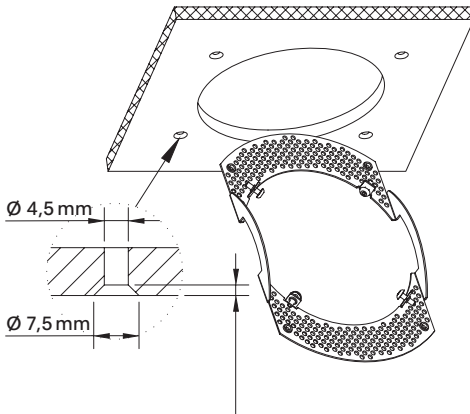


[3] Bohrlöcher erstellen. Die Trägerplatte einsetzen.

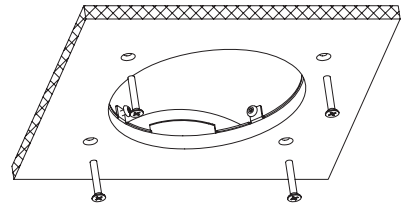


[4] Die Trägerplatte mit den beiliegenden M4  
Senkkopfschrauben befestigen.

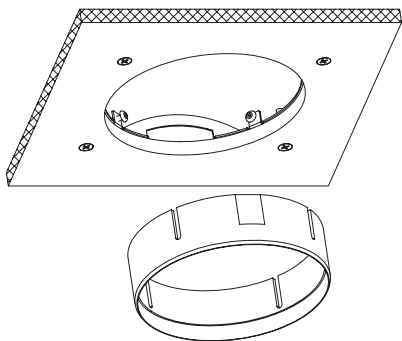


[5] Einbauring montieren.

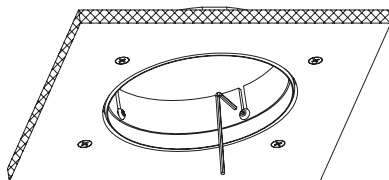

[6] Einbauring ausrichten und befestigen.

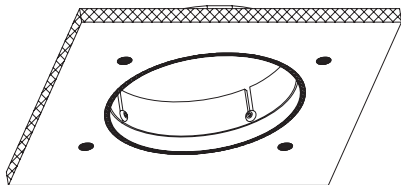

[7] Mit geeigneten Füllmaterial abziehen.

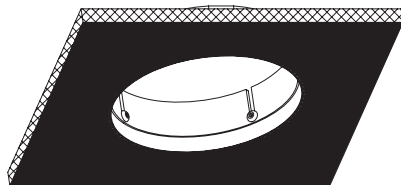

[8] Die Decke streichen.



# Nivo® Recessed Mount Drywall Ring



The Sigor Drywall Recessed Mount is designed for embedding in drywall panels using standard adhesive. The recessed lights from the Nivo lighting series can be seamlessly and flush-mounted into the surface, creating a particularly spectacular effect.

To be used with lights with  $\varnothing$  111 mm:

4811401 Nivo® Recessed Built-in Light fixed 111 mm 36° black  
4811501 Nivo® Recessed Built-in Light fixed 111 mm 36° white  
4811601 Nivo® Recessed Built-in Light fixed 111 mm 50° black  
4811701 Nivo® Recessed Built-in Light fixed 111 mm 50° white

4811001 Nivo® Swiveling Recessed Built-in Light 111 mm 36° black  
4811101 Nivo® Swiveling Recessed Built-in Light 111 mm 36° white  
4811201 Nivo® Swiveling Recessed Built-in Light 111 mm 50° black  
4811301 Nivo® Swiveling Recessed Built-in Light 111 mm 50° white

4812401 Nivo® Pendant Light Recessed Installation 36° black  
4812501 Nivo® Pendant Light Recessed Installation 36° white  
4812601 Nivo® Pendant Light Recessed Installation 50° black  
4812701 Nivo® Pendant Light Recessed Installation 50° white

To be used with lights with  $\varnothing$  142 mm:

4810401 Nivo® Swiveling Recessed Built-in Light 142 mm 36° black  
4810501 Nivo® Swiveling Recessed Built-in Light 142 mm 36° white  
4810601 Nivo® Swiveling Recessed Built-in Light 142 mm 50° black  
4810701 Nivo® Swiveling Recessed Built-in Light 142 mm 50° white

## Disposal


Sigor lights are RoHS compliant and should be returned to your dealer or an electronic waste collection point at the end of their life. Please do not dispose of them in household waste.

## Scope of Delivery


- Nivo® Recessed Mount Drywall Ring
- These installation and operating instructions

## Disclaimer


Note: In case of non-compliance with these instructions and improper use, no warranty claim exists. Sigor Licht GmbH assumes no liability in such cases.

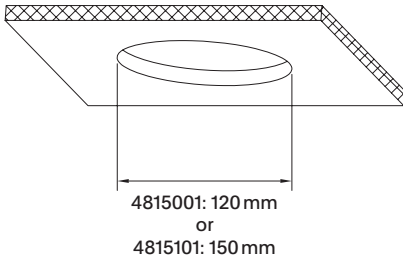


[1] Gypsum board thickness 9-25 mm. Create ceiling cutout accordingly with 120 or 150 mm diameter.

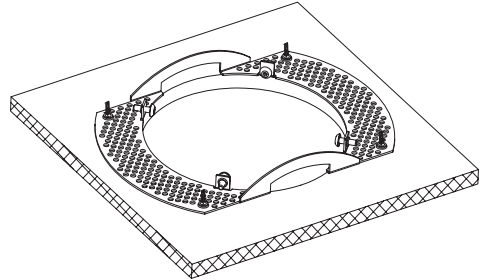

[2] Use the support plate as a template for drilling holes. Center the ring flush with the cutout.

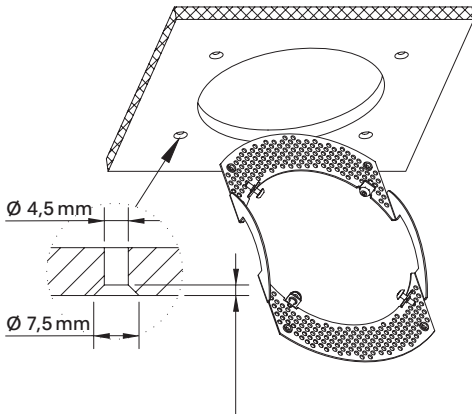


[3] Create drill holes. Insert the support plate.

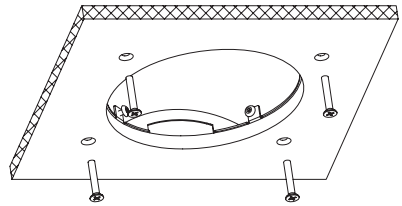


[4] Secure the support plate with the included M4 flathead screws.




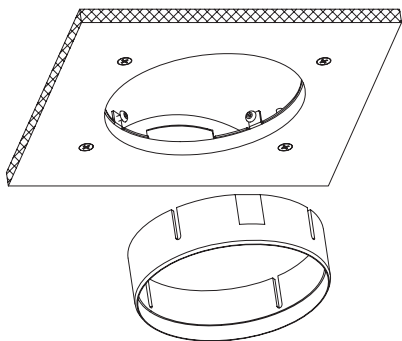


[5] Install the recessed ring.

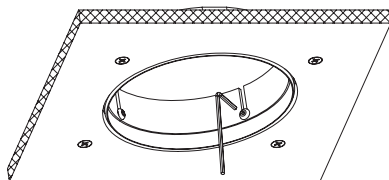

[6] Align and secure the recessed ring.

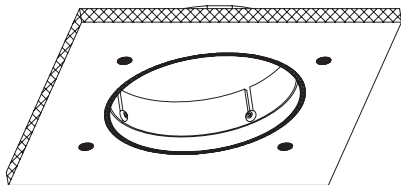

[7] Fill any gaps with suitable filler material.

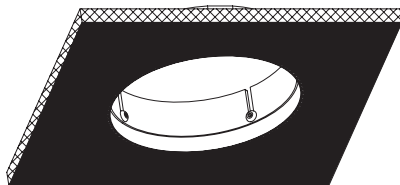

[8] Paint the ceiling.



# SIGOR

Sigor Licht GmbH

Eichenhofer Weg 81  
42279 Wuppertal  
Germany

Tel. +49 2339 1261-0  
Fax +49 2339 1261-61

[www.sigor.de](http://www.sigor.de)  
[info@sigor.de](mailto:info@sigor.de)